


Trisobuild™ 'U' Values

The depth below refers to both the minimum bracket & insulation height to achieve the stated 'U' value when using a UP1000 liner

- Depth 280 = 0.15 W/m²K. (assuming an enhanced spacer)
- Depth 240 = 0.18 W/m²K. (assuming an enhanced spacer)
- Depth 210 = 0.20 W/m²K.
- Depth 180 = 0.25 W/m²K.
- Depth 140 = 0.30 W/m²K.
- Depth 120 = 0.35 W/m²K.

Flexible pipe flashing system
(by others) to suite pipe
diameter fixed to panel face

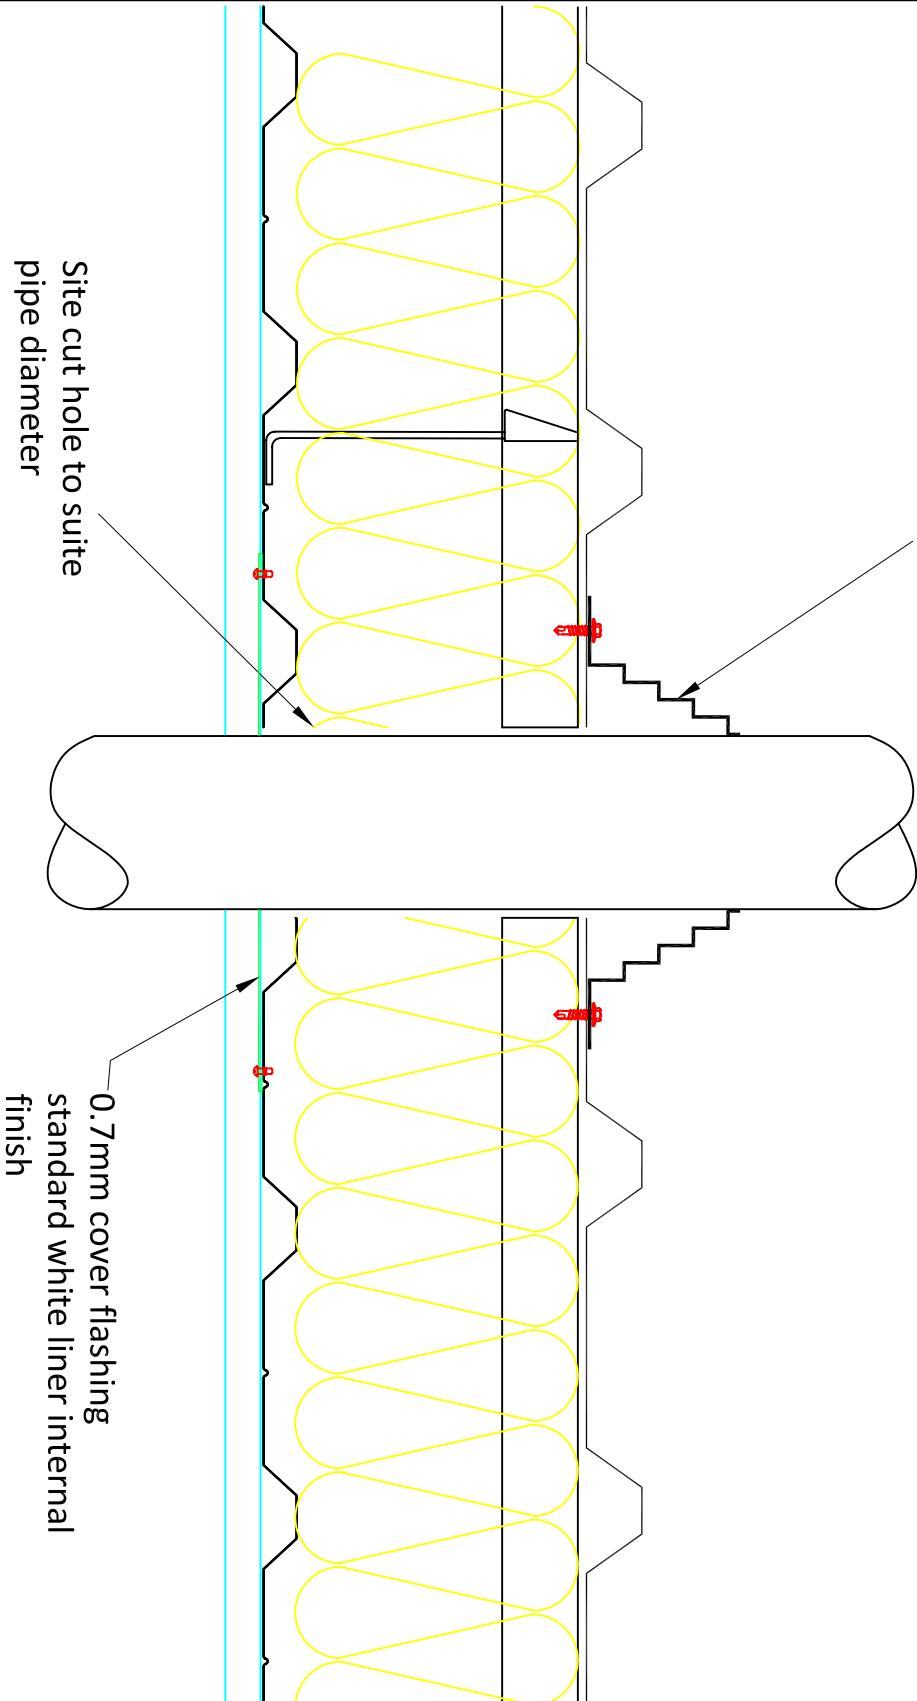

UP11811 Approved
462M/14.15.16 & 23

Tata Steel retain the right to amend the construction and technical specifications shown on this drawing without prior notice

TATA STEEL

SALES TEL: 01244 892199
TECHNICAL TEL: 01244 892133 / 34

www.tatasteelconstruction.com

PROJECT
TYPICAL TRISOBUILD™
BUILT UP ROOF DETAIL

TITLE
STANDARD PIPE SEAL

DRAWN BY
GMC

SCALE
NTS

APPROVED BY
DA

TOLERANCES

DATE
25/11/09

DRG. No.
R1-032A-01-C