

TECHNICAL INFORMATION SHEET

Webbing strap edge protection

This Technical Information Sheet outlines the importance of edge protection for webbing straps that are used to restrain steel loads for road transport.

1. Purpose

Edge protection is required to protect the strap from sharp or abrasive edges of the product or trailer. Failure to apply appropriate edge protection to the strap introduces the risk of cutting the strap and losing some or all of the restraint on the product.

Edge protection also reduces the stress on the outer fibres of the strap by increasing the radius of the corner. Using the a strap over a tight corner without edge protection will reduce strap strength significantly.





It is important to note that each strap used to keep the product on the trailer works as part of a system of restraints where failure of one component could compromise the entire system.

2. Where to apply

✓ Straps must be protected when in contact with any corner of the product or trailer with a radius of less than 3mm.

✓ Every point where the strap is in contact with a sharp or abrasive edge of the product **MUST** be adequately protected.

✓ Where straps are anchored to the trailer chassis beam, edge protection **MUST** be applied to protect the strap from trailer side raves.

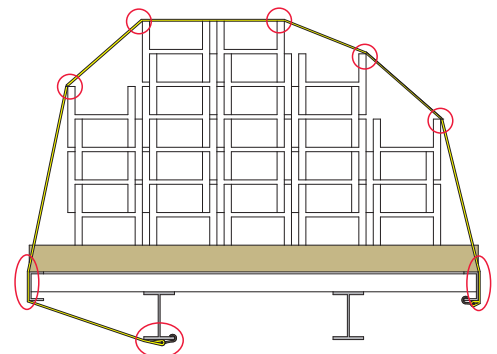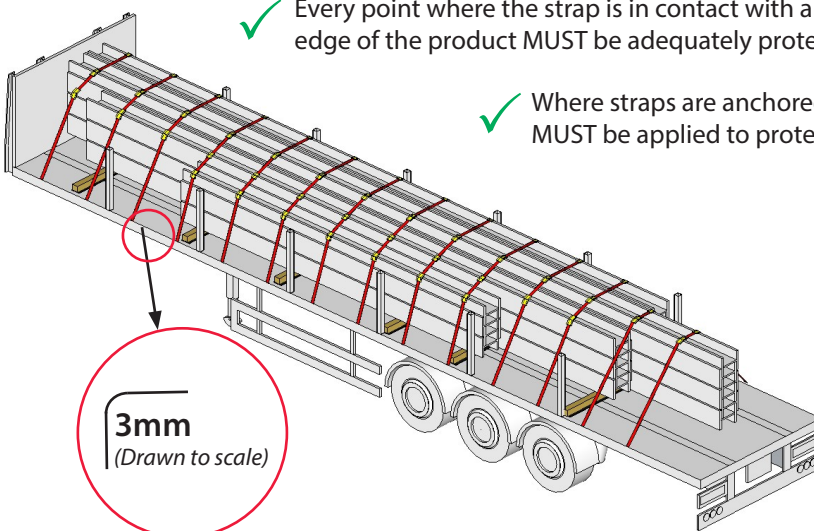

TECHNICAL INFORMATION SHEET

Webbing strap edge protection

3. Requirements

- Edge protection **MUST** be appropriate for the method of restraint being used:
 - high level of abrasion and cut resistance against sharp and/or rough edges of the product or trailer;
 - flexible enough to form to the shape of curved edges without damage e.g. coil bore;
 - ensure straps cannot slide off during use.

4. Examples of good and poor edge protection

✓ Heavy duty webbing wear sleeve (Polyester, minimum 3mm thick)



- ✓ Excellent abrasion resistance.
- ✓ Good flexibility.
- ✓ Recommended edge protection for ALL steel loads.

✗ Lightweight wear sleeve



- ✗ Poor abrasion resistance.
- ✗ Poor cut resistance.
- ✗ NOT to be used as edge protection for steel products.

✓ Coil bore packaging



- ✓ Good abrasion resistance.
- ✓ Good flexibility.
- ✗ Slippery - NOT to be used with tie-down restraints .
- ✓ Recommended for direct restraints through coil bores.

✗ Foam edge protection



- ✗ Poor abrasion resistance.
- ✗ Poor cut resistance.
- ✗ NOT to be used as edge protection for steel products.

✓ Plastic corner protectors



- ✓ Good abrasion resistance.
- ✗ Poor flexibility.
- ✓ Ideal for tie-down restraints.
- ✓ Recommended edge protection for straight edges ONLY.

✗ Cardboard corner protectors



- ✗ Poor flexibility.
- ✗ Slippery - NOT to be used with tie-down restraints .
- ✗ NOT recommended as edge protection for steel products.

It is NOT acceptable to use anti-slip matting as a substitute for edge protection.

The information and guidance contained in this document is intended for use only by Tata Steel UK Limited and its associated and subsidiary companies ("Tata Steel") in relation to its operations. All information and guidance in this document is based on Tata Steel's interpretation of prevailing legislation and best practice. Tata Steel gives no warranty or representation as to the accuracy of the information or for the guidance being for, or suitable for, a specific purpose. The information and guidance does not constitute legal or professional advice. All implied warranties and conditions are excluded, to the maximum extent permitted by law. Use of this document by any third party is at your own risk. Save to the extent that liability cannot be excluded by law, Tata Steel is in no way responsible or liable for any damage or loss whatsoever arising from the use of or reliance on the information and guidance contained in this document.