

Tata Steel retain the right to amend the construction and technical specifications shown on this drawing without prior notice.

Fire Performance in accordance with EN 1364-1 when running the panel horizontally



Insulation - 21 mins

Integrity

Sustained flaming penetration - 264 mins

Gap gauge - 264 mins

Cotton pad - 73 mins

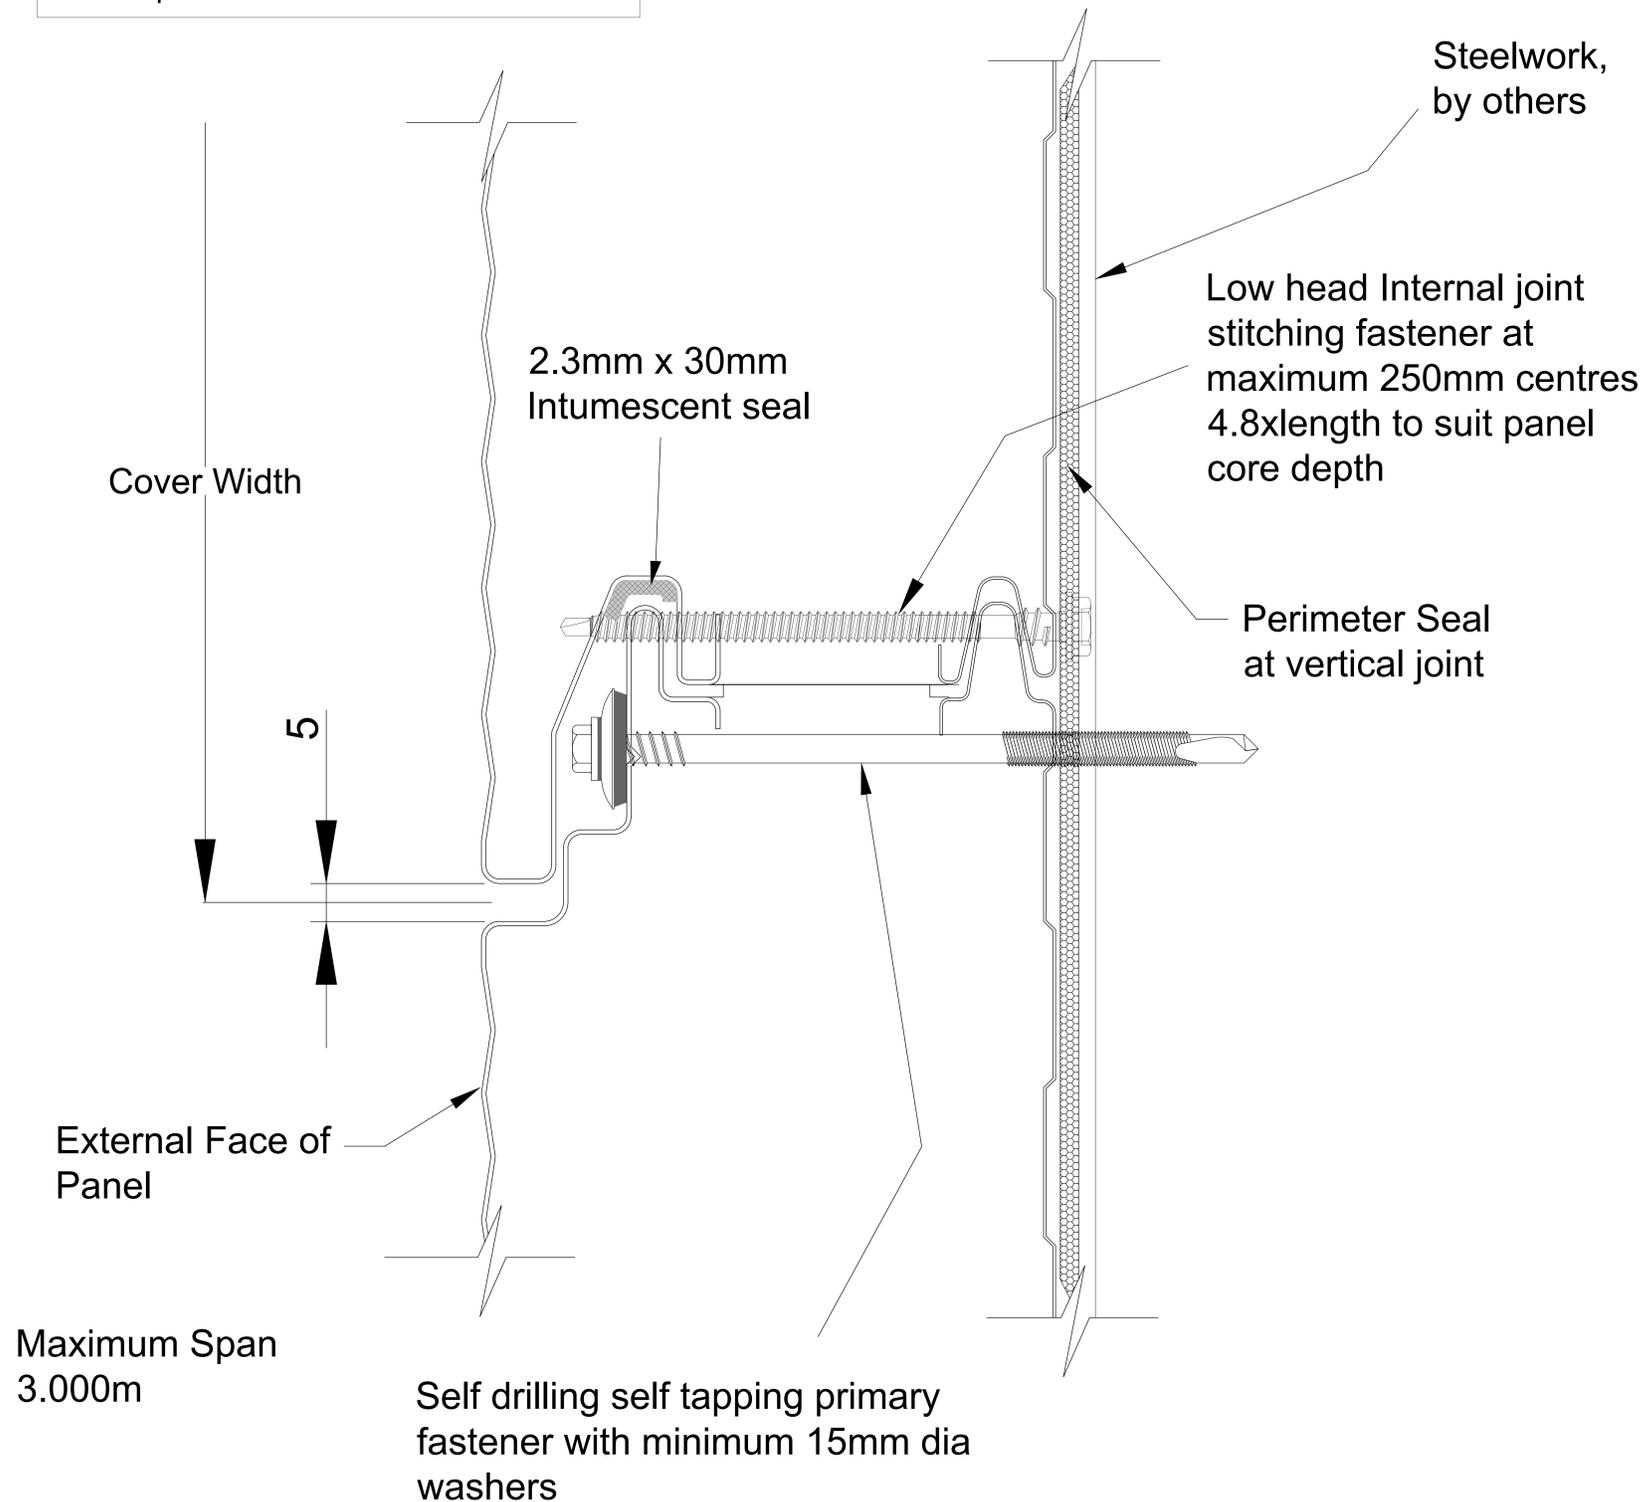

All support steelwork by others

TRIMAPANEL U-VALUES

90mm Core = 0.24W/m² K.
120mm Core = 0.17 W/m² K.



Building Systems UK
A Tata Steel enterprise

Technical Office - TEL : 01244 892199
www.buildingsystemsuk.co.uk

PROJECT		Trimapanel System Typical Details	
TITLE		FW Horizontal Joint Wall Joint	
DRAWN BY	LK	SCALE	NTS
APPROVED BY	PS	TOLERANCES	
DATE	08/08/24	DRG. No.	W2-029-03-A