




Fire rating - 20 mins insulation & 262 mins integrity

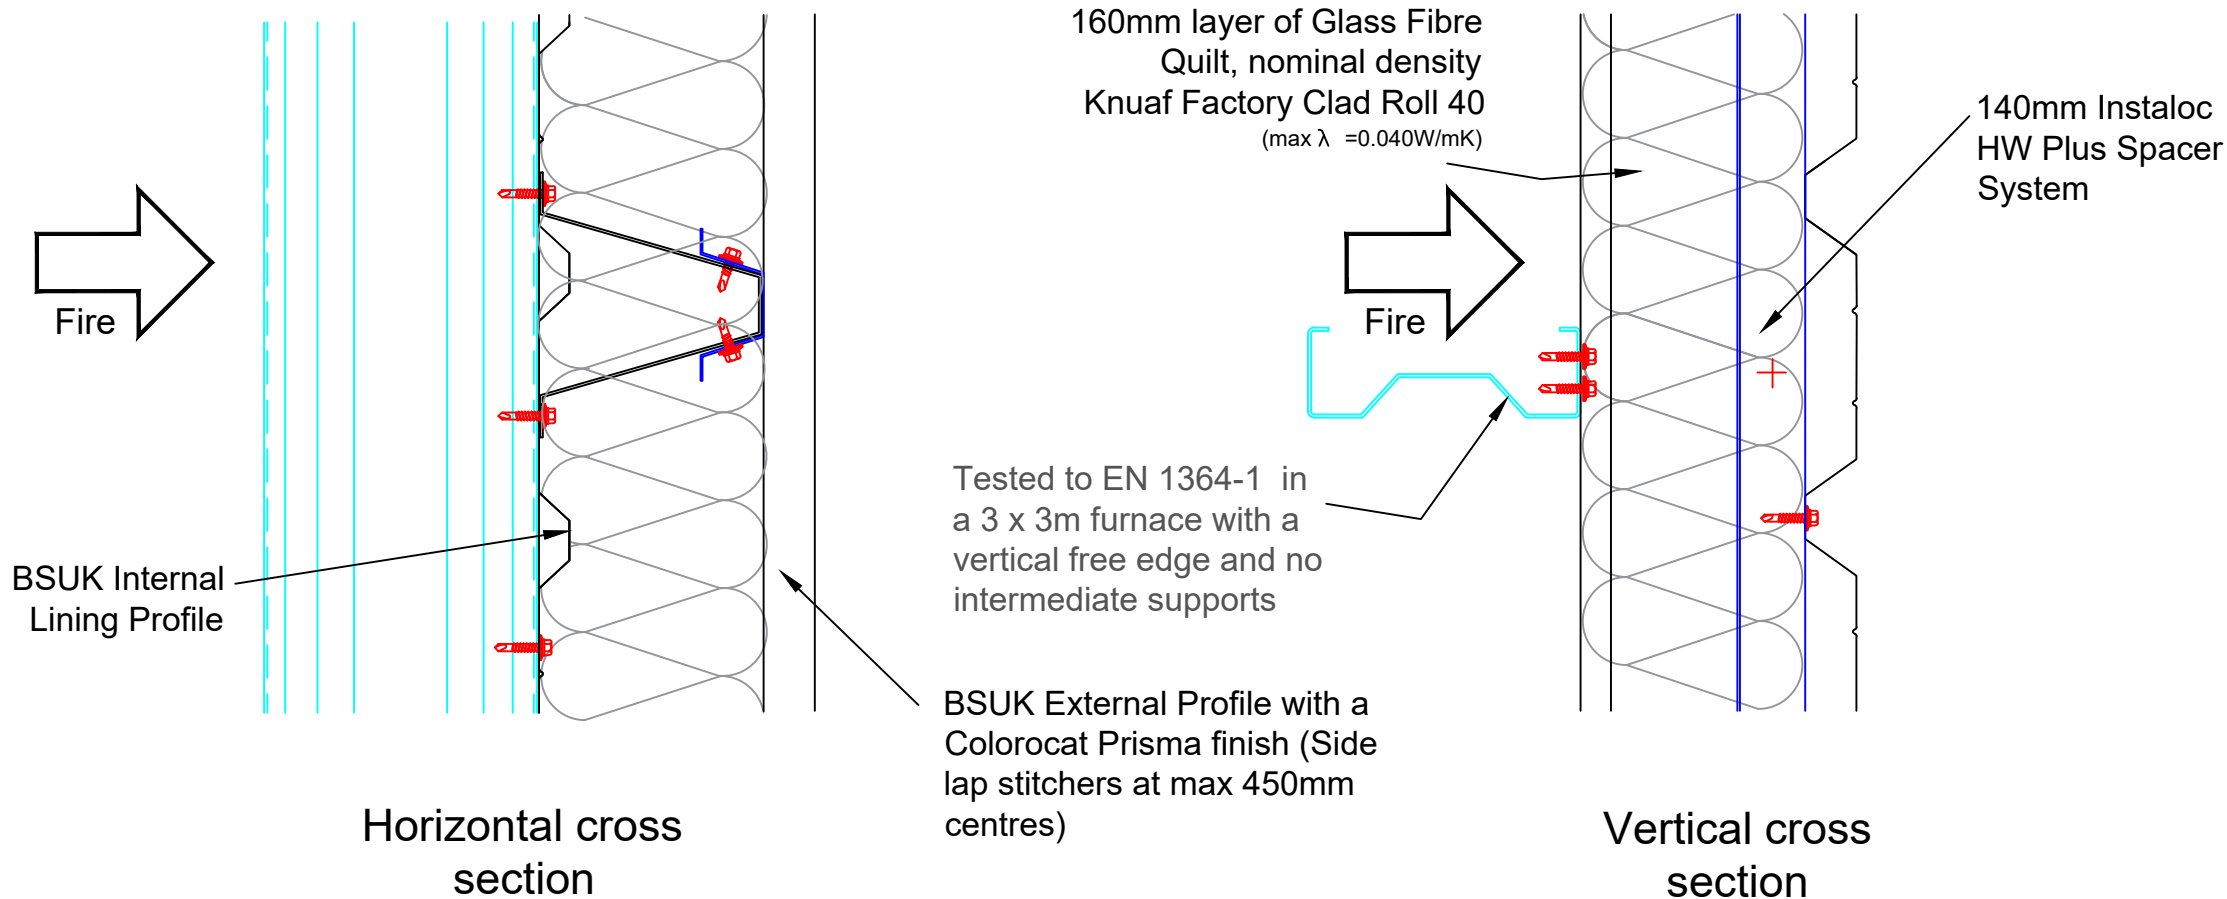

All support steelwork by others

TRISOBUILD™ U-VALUES

System as shown = 0.35 W/m²K

Fire performance ratings will be unaffected if deeper insulation and spacer brackets are used for lower U-value requirements

Building Systems UK
A Tata Steel enterprise

Technical Office - TEL : 01244 892199
www.buildingsystemsuk.co.uk

PROJECT	
Typical Trisobuild HW Details	
TITLE	
Trisobuild FW15 Fire wall	
DRAWN BY	SCALE
LK	NTS
APPROVED BY	TOLERANCES
PS	
DATE	DRG. No.
17/01/25	W1-001-03