




Fire rating - 39 mins insulation & 242 mins integrity

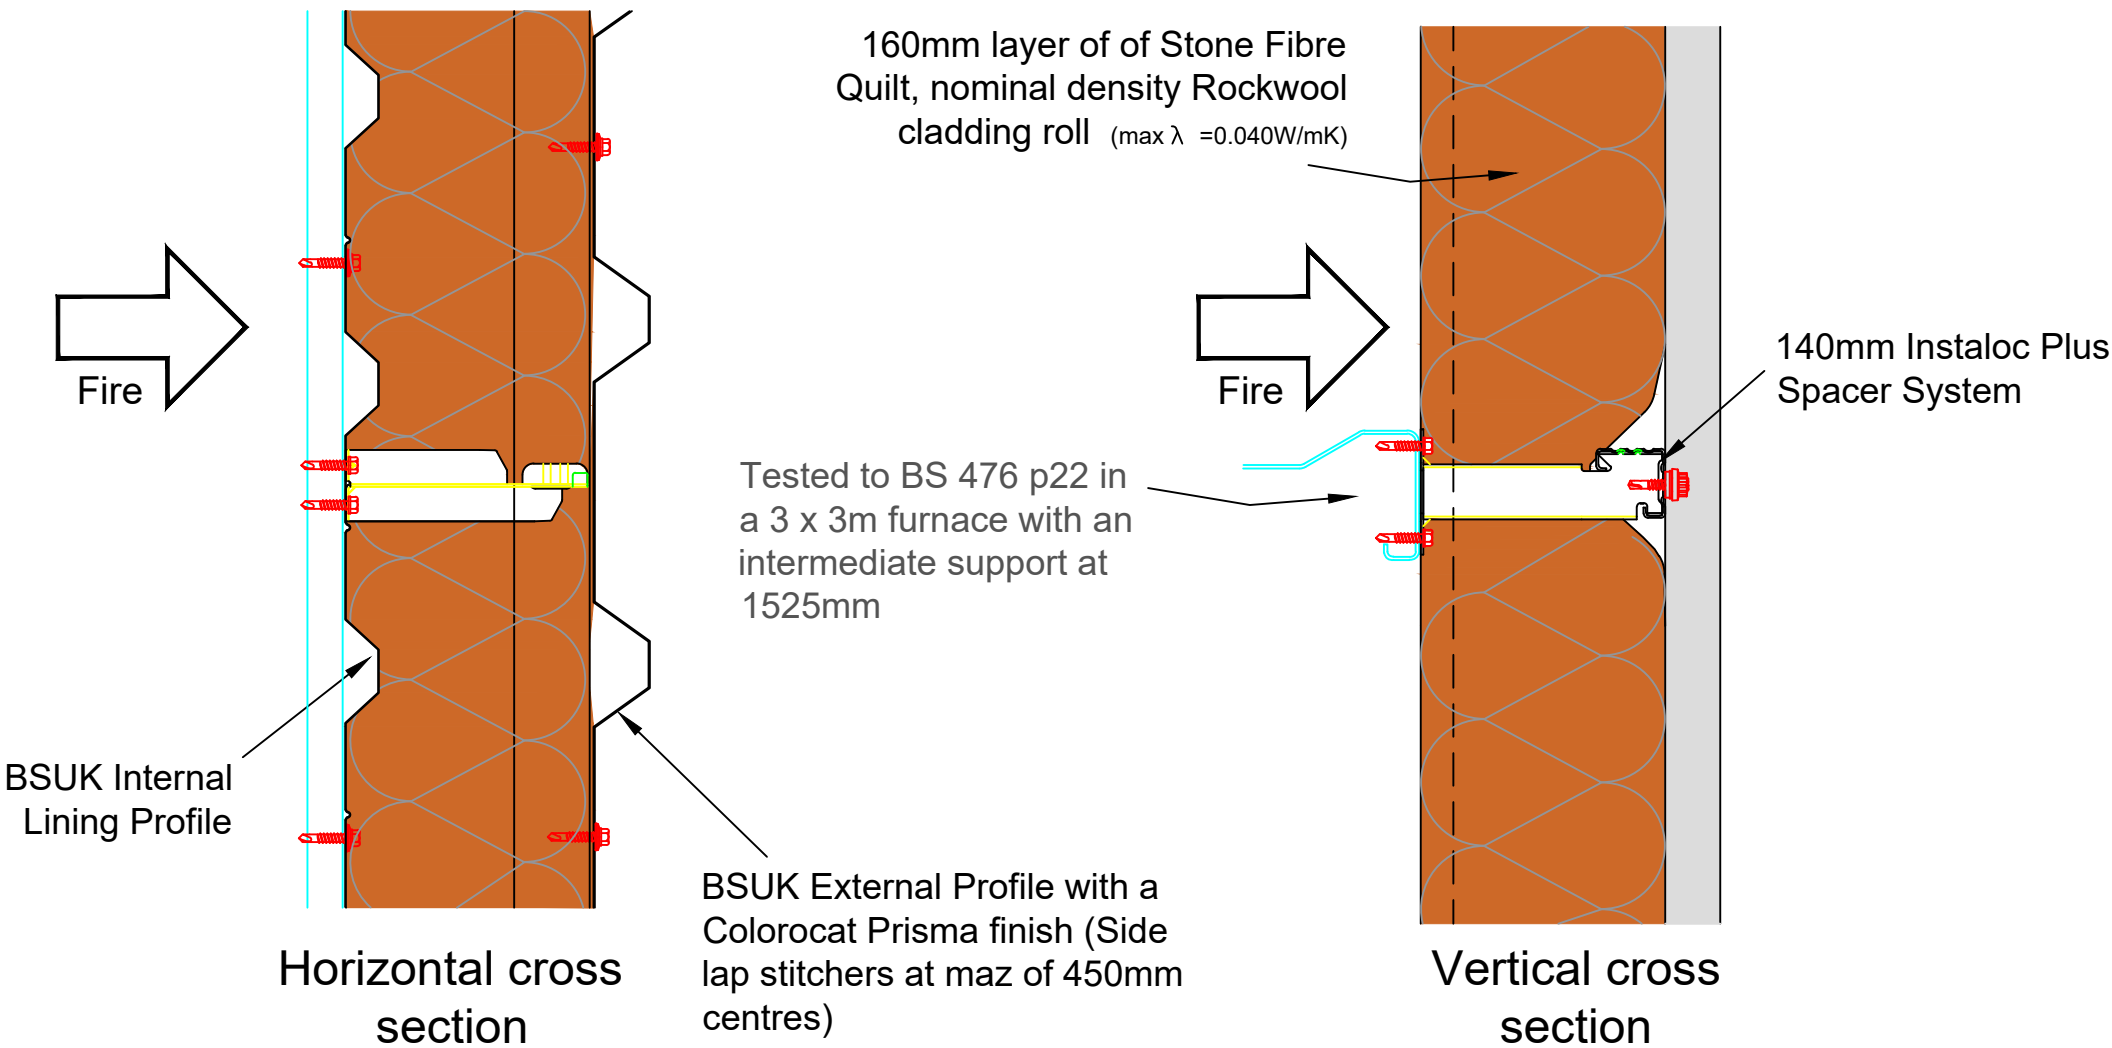

All support steelwork by others

TRISOBUILD™ U-VALUES

System as shown = 0.35 W/m²K

Fire performace ratings will be uneffected if deeper insulation and spacer brackets are used for lower U-value requirements

**Building Systems UK**  
A Tata Steel enterprise

Technical Office - TEL : 01244 892199  
www.buildingsystemsuk.co.uk

PROJECT	
Typical FW30 Trisobuild Vertical Wall Details	
TITLE	
Fire Wall - 39min insulation / 242min integrity	
DRAWN BY	SCALE
LK	NTS
APPROVED BY	TOLERANCES
PS	
DATE	DRG. No.
14/01/2025	W1-029C-02